


# ARPD-460-4S

## 4-Way Power Divider

### Specifications

SN	Parameters	Specifications
1	频率范围 Frequency Range	400~6000 MHz
2	插入损耗 Insertion Loss	≤ 2.4 dB (Excluding theoretical loss 未含理论损耗 6.0 dB)
3	输入驻波 Input Port VSWR	Typ.1.18 / Max.1.3
4	输出驻波 Output Port VSWR	Typ.1.16 / Max.1.2
5	隔离度 Isolation	Typ.28dB / Min.20dB
6	幅度平衡 Amplitude Balance	≤ 0.3dB
7	相位平衡 Phase Balance	±4°
8	阻抗 Impedance	50 Ohms
9	端口接头 Input/Output Connectors	SMA-Female
10	承受功率 Power Rating	Splitter 分路器用时 30W; Combiner 合路器用时 2W
11	工作温度 Operation Temperature	-35°C ~ +75°C
12	表面处理 Surface Finishing	Sandblasting natural color conductive oxide 喷砂本导
13	外形尺寸 Outline Dimensions	127*64*12 (mm)
14	重量 Weight	218 (g)

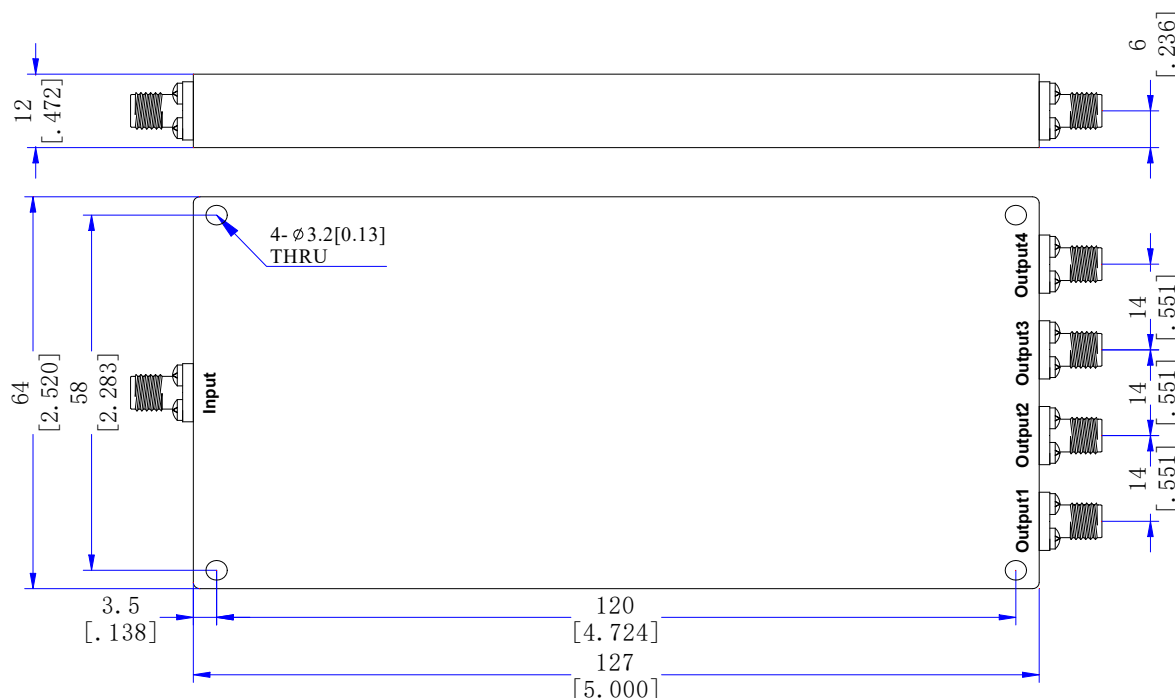

Note: Dimensions (mm / [inch]), General tolerance (±0.3)